


AMENDMENT #1

Please note the following changes for Schedule A – Irrigation Drawing

Please be advised that the following will be completed prior to RFP award. Please do not include the below in your pricing:

1. Replace 6 zone panel in existing controller with 9 zone panel and run 8 power and 1 common wire to new valve locations in park.
2. Upsize pipe after existing 1 inch DCVA to 1.5 inch. Reconnect existing blowout and zone valve for trees on Lone Oak Pl.
3. Install new 1.5 inch main line to park through existing sleeve. See civil for record of exact location of sleeve. Sleeve will require extending past new sidewalk.
4. Disconnect the two trees from existing Lone Oak tree zone at end of sleeve.

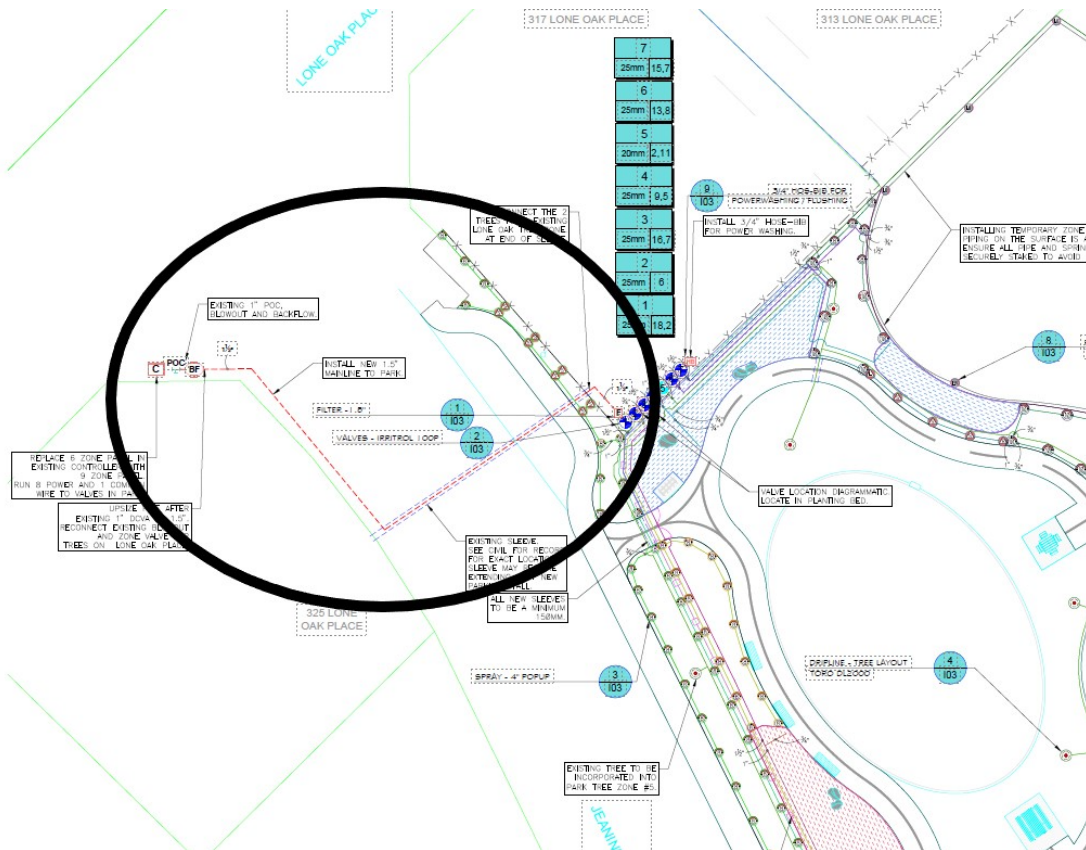

For any questions, please contact:

Wolfgang Schoenefuhs
 Parks Planning Coordinator
wschoenefuhs@langford.ca